

## PSA Oxygen Generator

# AS-R



AirSep Alpha-Series Oxygen Generators produce from 20 to 5,000 cubic feet of oxygen per hour at up to 95.5% oxygen concentration. When electricity and a source of compressed air is supplied, these dependable machines can provide oxygen for any application.

### Features

- Produces oxygen from an independent compressed air source
- Microprocessor controlled
- Low operating cost
- Automatic and unattended operation
- Easy to install and maintain
- HMI NEMA 4 Touchscreen control panel with integrated oxygen concentration monitor

### Typical Applications

#### Manufacturing

- Cutting/Brazing/Soldering
- Thermal/Chemical Oxidation

#### Medical

- Hospital Systems

#### Environmental

- Ozone (Generator) Feed Gas
- Environmental Remediation
- Waste/Water Treatment

#### Glass Industry

- Glass Work/Manufacturing/Blowing

#### Additional

- Fish Farming


## Specifications

### AS-R


Product Characteristics	
Product Flow	3,000 - 3,700 SCFH (78.86 - 97.27 Nm <sup>3</sup> /hr) <sup>1</sup>
Product Pressure	45-65 psig (310-448 kPa) <sup>1</sup>
Product Concentration (nominal)	93%
Product Dew Point	-100°F (-73°C)
Dimensions (W x D x H) <sup>2</sup> (nominal)	114 x 73 x 157 in (290 x 185 x 399 cm)
Weight <sup>2</sup>	12,906 lb (5,854 kg)
Physical Connections	
Compressed Air Inlet	3" 150# ANSI Flange
Product Gas Outlet	1" NPT
Ambient Operating Conditions	Locate the oxygen generator in a well-ventilated area that is protected from weather elements and remains between 40°F (4°C) and 104°F (40°C)
Feed Air Requirements	Flow Rate: <i>Refer to chart on reverse page.</i> Clean and Dry "Plant Air" (Class 5.6.5 per ISO 8573.1) Pressure: 90 psig (621 kPa) minimum Temperature: 122°F (50°C) maximum
Control Power Requirements (Single Phase)	120 V ~ ±10%, 50/60 Hz, 3.0 A or 220 V ~ ±10%, 50/60 Hz, 1.0 A
1,060 Gallon Oxygen Receiver Characteristics	
Dimensions (Dia. x H)	56 x 152 in (142 x 386 cm)
Weight	2,000 lb (907 kg)

<sup>1</sup> SCF (Standard cubic foot) gas measured at 1 atmosphere and 70°F / Nm<sup>3</sup> (Normal cubic meter) gas measured at 1 atmosphere and 0°C

<sup>2</sup> Includes filter assembly which is shipped separately, field assembly (by others) required.

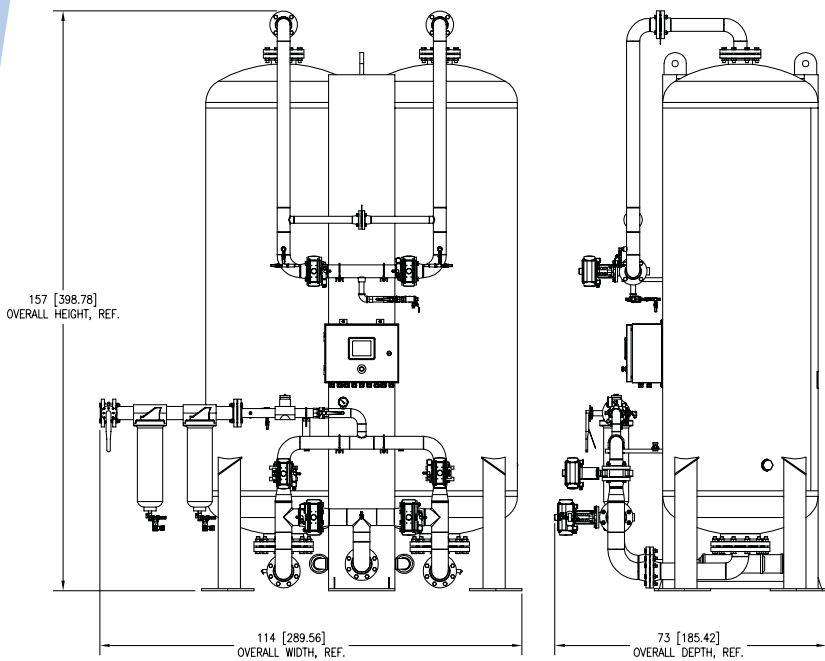

Note: All dimensions are nominal.

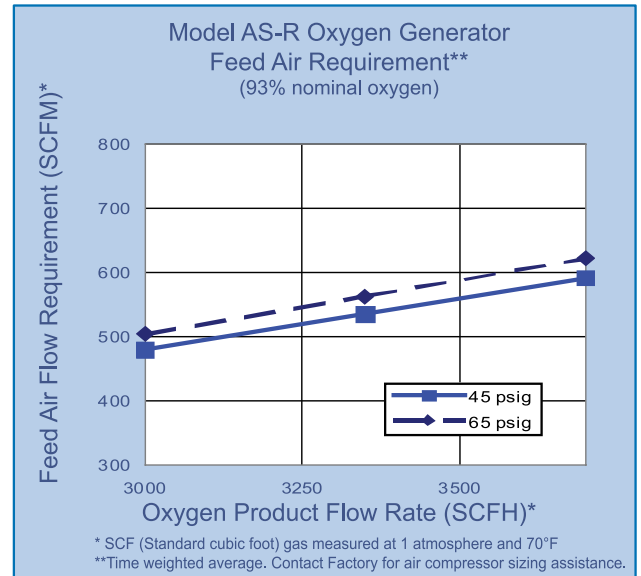

## Ordering Information

Model	Part Number	Description
AS-R	AS110-7	With HMI NEMA 4 Touchscreen and oxygen concentration monitor, 120 V ~ ±10%, 50/60 Hz <sup>1</sup>
	AS110-8	With HMI NEMA 4 Touchscreen and oxygen concentration monitor, 220 V ~ ±10%, 50/60 Hz <sup>1</sup>
Accessories	TA082-1	1,060 Gallon Oxygen Receiver
<b>Shipping Information</b>		<b>AS-R</b>
		<b>1,060 Gallon Oxygen Receiver</b>
Class		92.5
Commodity Classification Number		8421.39.8040
Dimensions (W x D x H)		87 x 158 x 75 in (221 x 401 x 191 cm) Generator (No Pallet) 48 x 48 x 22 in (122 x 122 x 56 cm) Filter and Pallet
Gross Weight		12,720 lb (5,770 kg) Generator (No Pallet) 240 lb (109 kg) Filter and Pallet

### Warranty: 1 Year Parts and Factory Labor\*\*\*

\*\*\* An unprotected or inadequately ventilated environment, or improper control power may cause damage to the oxygen generator not covered under warranty.

<sup>1</sup> Specify oxygen flow and pressure at time of order.

All performance ratings based on an ambient temperature up to 100°F (38°C), up to 1,000 feet elevation, and 80% relative humidity.

Copyright (C) 2014 Chart Industries

CAIRE Inc./Chart SeQual Technologies Inc./Chart Inc./AirSep Corp. reserves the right to discontinue its products, or change the prices, materials, equipment, quality, descriptions, specifications and/or processes to its products at any time without prior notice and with no further obligation or consequence. All rights not expressly stated herein are reserved by us, as applicable.