

ZAPON PAINTING

ZAPPON-CENTRIFUGA CON VASCA INTERNA.

Le zappo-centrifughe sono indicate prevalentemente per l'impregnazione delle minuterie metalliche caricate alla rinfusa nei cestì, in lacche per verniciature di bottoni e fibbie.

Impregnazioni di zincolamellare di vari tipi, sigillature e oliature del materiale Post-galvanico.

Queste macchine sono costruite in due versioni, con vasca interna e con vasca esterna.




Da tenere presente che per esigenze dove il materiale deve essere inclinato e basculato la versione adeguata è la zappo-centrifuga con vasca esterna.

Inoltre le zappo-centrifughe possono essere manuali o sotto impianti automatici.

OPTIONAL:

Supporto asta bandiera e paranco.

Swing electric hoist.

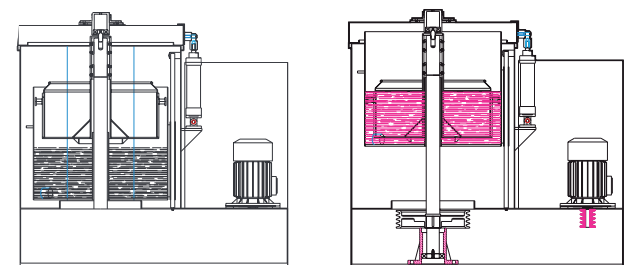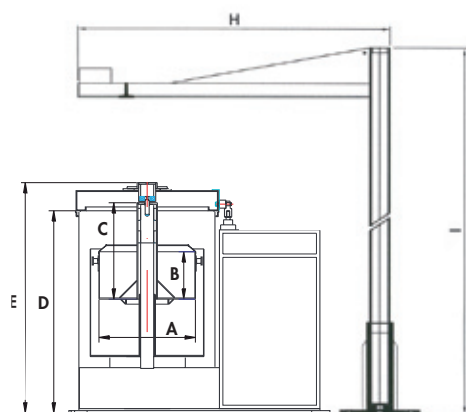

ROTARY PAINTING MACHINE WITH INTERNAL TANK.

The Rotary painting machine are given mainly for the impregnation of small metal loaded in bulk in baskets, in lacquers for painting of buttons and buckles.

Impregnation of zinc flake of various types, sealing and oiling of the material Post-plating.

These machines are available in two versions, with internal tank and external tank.

Keep in mind that where the material needs to be tilted and receiver, the proper version is the painting machine with rotary external tank.

Furthermore, the rotary painting machine can be manual or in automatic systems.



CARATTERISTICHE TECNICHE / TECHNICAL DETAILS:

MOD.	360	480	550
• A	360	480	550
• B	155	230	230
• C	409	480	497
• D	707	910	937
• E	880	1060	1070
• F	1000	1200	1280
• G	500	650	730
• H	-	2510	2765
• I	-	1450	1450
• MOTORE / MOTOR:	0,75 kw	1,5 kw	2.2 kw
• PORTATA / CAPACITY:	20 kg	30 kg	70 kg
• GIRI / R.P.M.:	500 / 1'	465 / 1'	345 / 1'
• PESO / WEIGHT:	280 kg	410 kg	495 kg